
The perfect solution for ventilation with acoustic control **PyrAcoust**



- Best acoustic performance available: up to 45 dB
- Achieves Part F requirement of 2500EA / 5000EA
- Modularity of acoustic sets
- Aesthetically pleasing design
- Excellent weather performance
- Easy to install






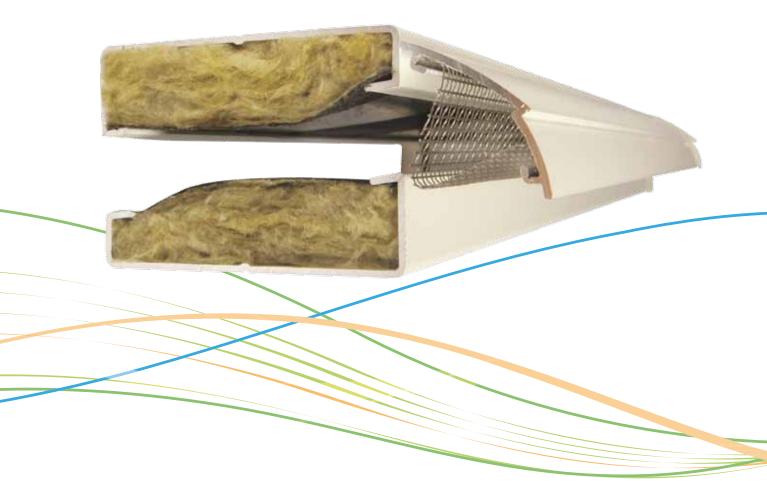




Product description








- 1 Pyramid + 1 acoustic module (for internal or external installation) : providing noise reduction with discreet internal aesthetics
- 1 Pyramid + 2 acoustic modules (for internal and external installation): providing maximum noise reduction




The external canopy offers excellent weather protection and incorporates a stainless steel fly screen. The vent is easy to open and control by the homeowner. The upward air deflection reduces the risk of draughts. The PyrAcoust Vent is available in anodised silver or in any RAL colour, with black or white end caps. It is designed for use with Timber, PVCu and Aluminium windows.

Product dimensions


Eaquivalent Area mm²	Description	Sound absorption in open position Dne,w Dne,w (c) Dne,w (ctr)		
2500 EA	Vent + 1 Acoustic module	42 dB(A)	41 dB	40 dB
2500 EA	Vent + 2 Acoustic modules	45 dB(A)	43 dB	42 dB
5000 EA	Vent + 1 Acoustic module	39 dB(A)	38 dB	37 dB
5000 EA	Vent + 2 Acoustic modules	42 dB(A)	40 dB	38 dB






Internal Vent

Slot size



External Canopy



The last version of the technical brochure is available on www.aralco.be

All rights reserved. Nothing from this publication may be duplicated, saved in an automated database or made public, in any form or in any way, either electronically, mechanically, by photo copies, pictures or any other way, without preceding written permission from Aralco NVS. © Aralco NVS, Waregem, 2014.

+32 56 52 80 60 info@aralco.be www.aralco.be

Aralco NVS









